



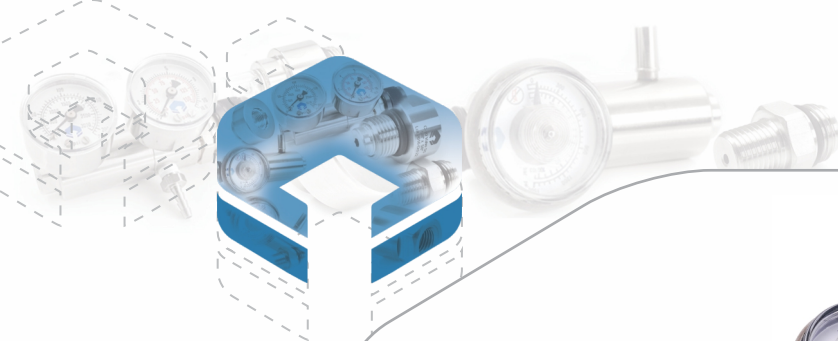

MODEL 1220

PRESSURE REDUCING REGULATOR C10 SS (TWO STAGE)

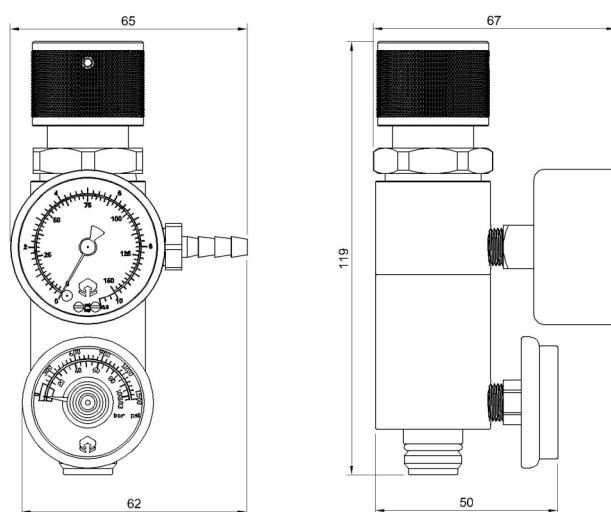

The 1220 regulators are adjustable two stage pressure reducing regulators. The two stage designs provides precise and stable outlet pressure as the inlet pressure reduces gradually.

Materials of construction

Body	Stainless Steel
Gauge	Stainless Steel
Lock Nut	Brass Nickel Plated
Piston	Stainless Steel
Valve Seat	PCTFE
Seals	Viton
Diaphragm	SS316
Control Knob	Aluminum Anodized

Outlet pressure options for all the variants

Outlet pressure	Outlet pressure gauge
0 to 1 bar	0 to 2 bar
0 to 4 bar	0 to 10 bar
0 to 7 bar	0 to 10 bar

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Inlet Gauge	Weight Kg
1220	0 to 1200 psig/ 83 bar	Stainless Steel for Reactive Gases	5/8"x18UN C10	3/16" Barb 4.8mm	Stainless Steel 0 to 1500 psig/ 103 bar	0.570 Kg

Warranty:- All regulators are warranted for 12 months.