



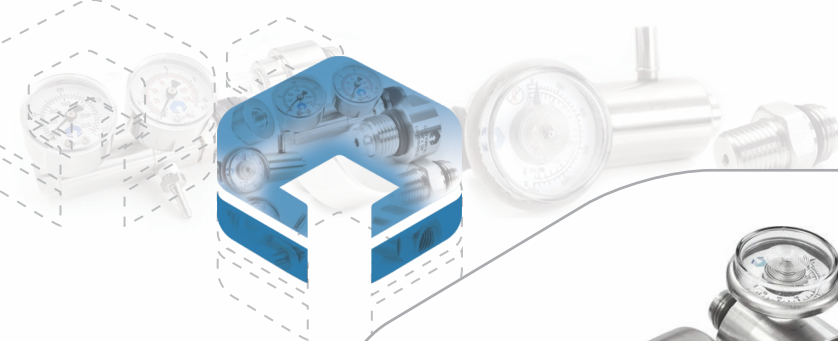

MODEL 1260-M

PRESSURE REDUCING REGULATOR C10 SS (SINGLE STAGE)

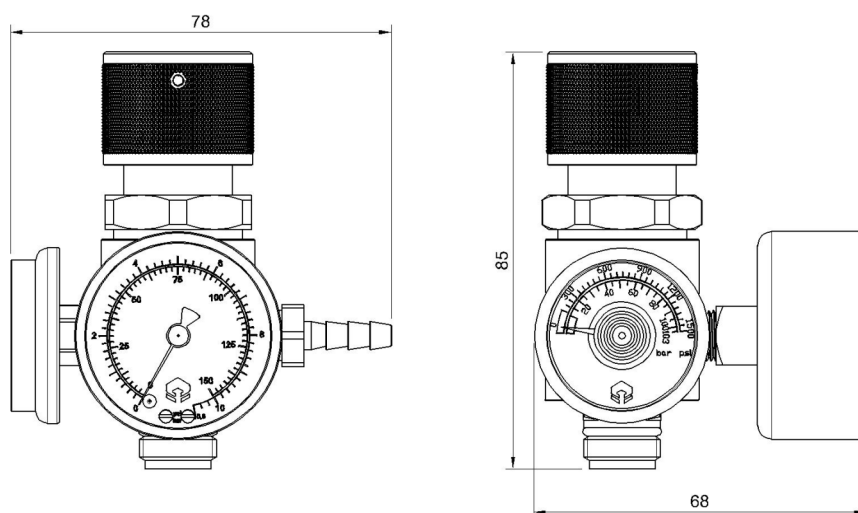

The 1260-M regulators are adjustable single stage pressure reducing regulators. These single stage designs provides stable outlet pressure with respect to the reducing inlet pressure.

Materials of construction

Body	Stainless Steel 303
Gauge	Stainless Steel 316
Lock Nut	Brass NP
Valve Seat	PCTFE
Seals	Viton
Diaphragm	SS316
Control Knob	Aluminum Anodized
Valve Spring	SS 316

Outlet pressure options for all the variants

Outlet pressure	Outlet pressure gauge
0 to 1 bar	0 to 2 bar
0 to 4 bar	0 to 10 bar
0 to 7 bar	0 to 10 bar

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Inlet Gauge	Weight Kg
1260-M	0 to 1200 psig/ 83 bar	Stainless Steel for Reactive Gases	5/8"x18UN C10	3/16" Barb 4.8mm	Stainless Steel 0 to 1500 psig/ 103 bar	0.380 Kg

Warranty:- All regulators are warranted for 12 months.