



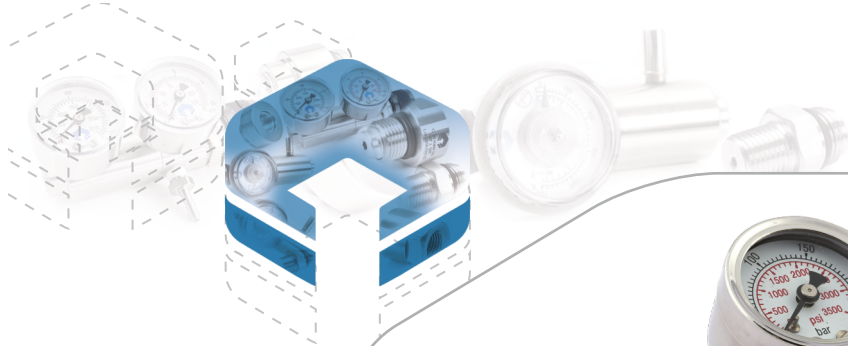

MODEL 2003

HP DIAL-A-FLOW REGULATOR BRASS NP

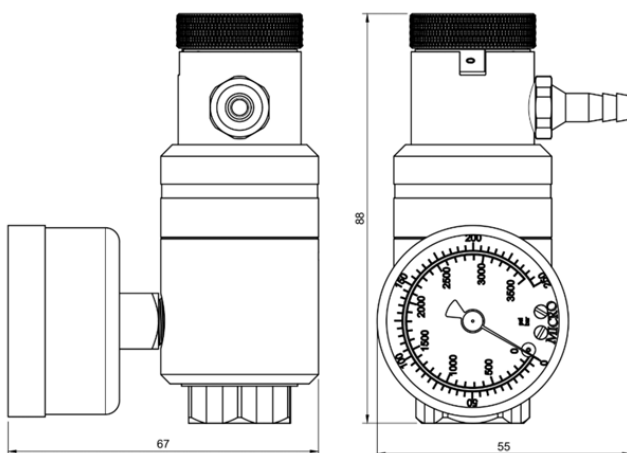

The Dial-A-Flow regulator uses a single stage design which give the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases and handheld gas detectors.

Materials of construction

Body	Stainless Steel
Neck	Aluminum Black anodized
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Bonnet	Aluminum Black Anodized

Flow rate options

1.	0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn
2.	0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn
3.	0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Flow rates	Inlet Connection	Outlet Connection	Gauge	Weight Kg
2003	0 to 3000 psig/ 207 bar	Brass NP - For Non- Reactive Gases	Refer flow rate table	¼" NPT Female	3/16" Barb 4.8mm	Brass 0 to 3190 psig 220 bar	0.400 Kg

Warranty:- All regulators are warranted for 12 months.