



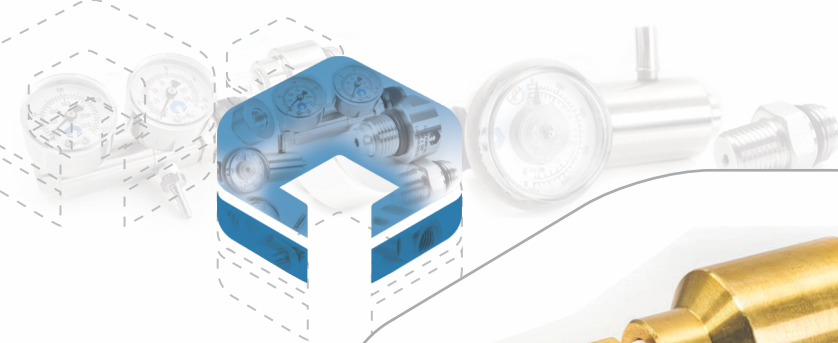

MODEL 203

FLOW CONTROL VALVE- CGA-600 – 3/16" BARB HOSE BRASS

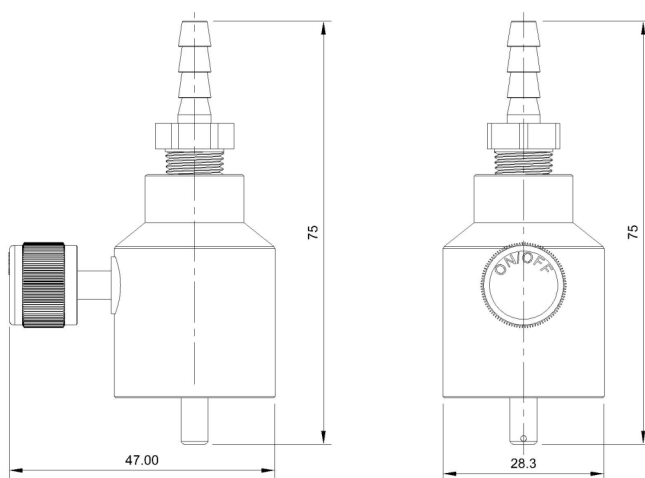

The flow control valve CGA-600 inlet is used for non-reactive calibration gases and industrial safety monitors.

Materials of construction

Body	Brass
Spindle & Nut	Brass
Knob	Aluminum black anodized
Barb Hose	Brass
Seats and Seal	Buna-N

Model	Working Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Weight Kg
203	0 to 600 psig/ 40 bar	Brass for non-reactive gases	CGA-600	3/16" Barb Hose	0.141 Kg

Warranty:- All valves are warranted for 12 months.