



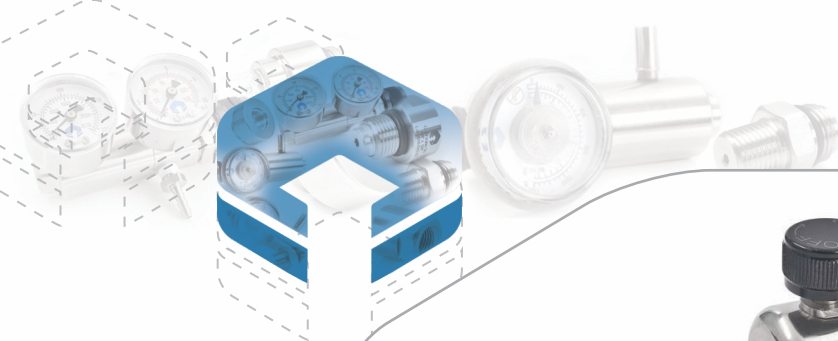

MODEL 205

FLOW CONTROL VALVE-S FLOW-F1 BRASS NP

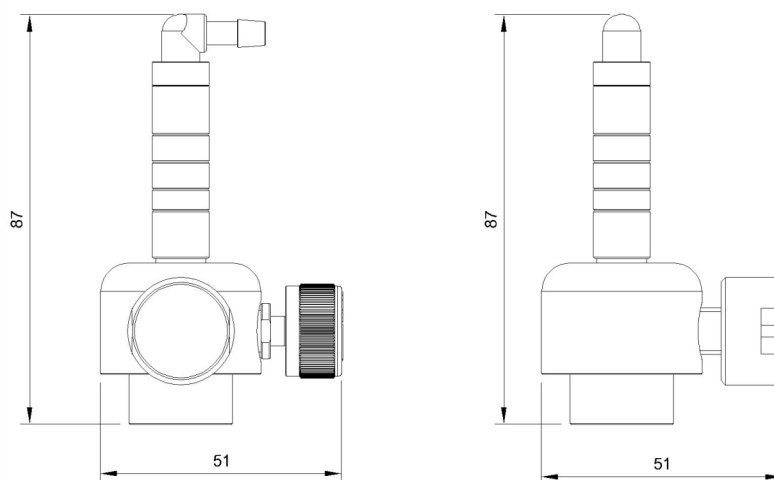

The flow control valve S Flow- F1 is used for non-reactive calibration gases and industrial safety monitors.

Materials of construction

Body	Brass Nickel Plated
Spindle & Nut	Brass
Knob	Aluminum black anodized
Flow Meter	Acrylic
Seats and Seal	Buna-N

Model	Working Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Weight Kg
205	0 to 300 psig/ 20 bar	Brass NP for non-reactive gases	Aerosol	3/16" Barb Hose	0.233 Kg

Warranty:- All valves are warranted for 12 months.