



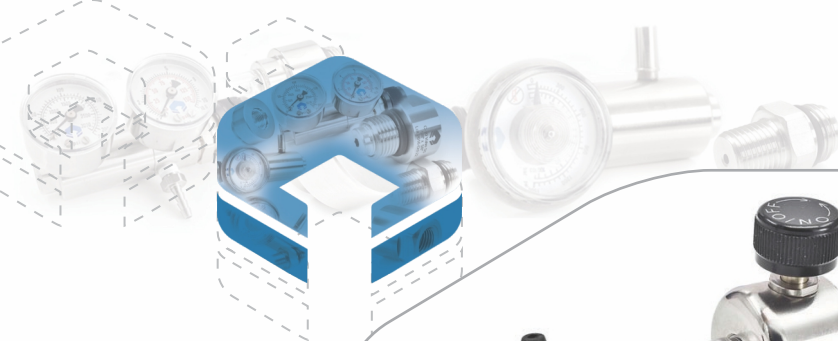

MODEL 206

FLOW CONTROL VALVE-S FLOW-F2 BRASS NP

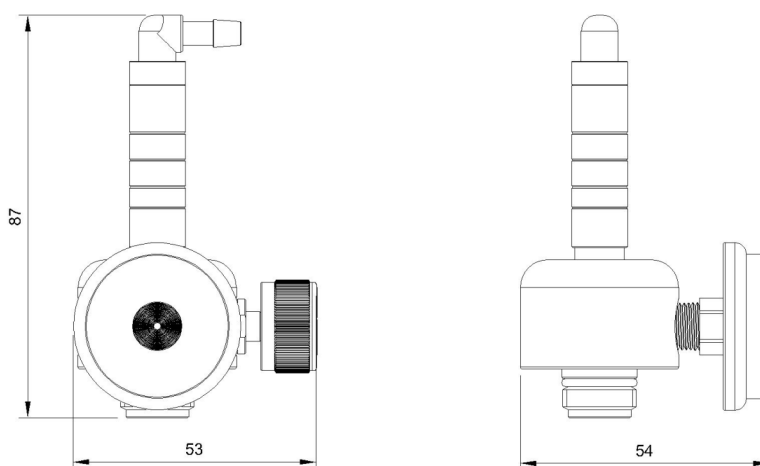

The flow control valve S Flow- F2 is used for non-reactive calibration gases and industrial safety monitors.

Materials of construction

Body	Brass Nickel Plated
Spindle & Nut	Brass
Knob	Aluminum black anodized
Flow Meter	Acrylic
Seats and Seal	Buna-N, Viton

Model	Working Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Weight Kg
206	0 to 1200 psig/ 83 bar	Brass for non-reactive gases	5/8" X 18UN-C10	3/16" Barb Hose	0.209 Kg

Warranty:- All valves are warranted for 12 months.