



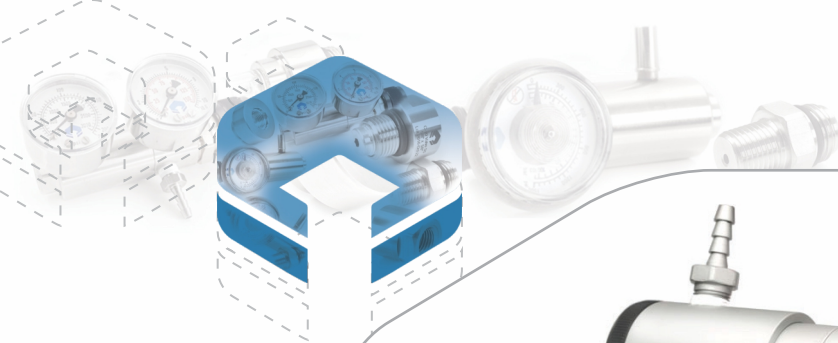

MODEL 3002

VARI FLOW REGULATOR C10 ALUMINUM ANODIZED

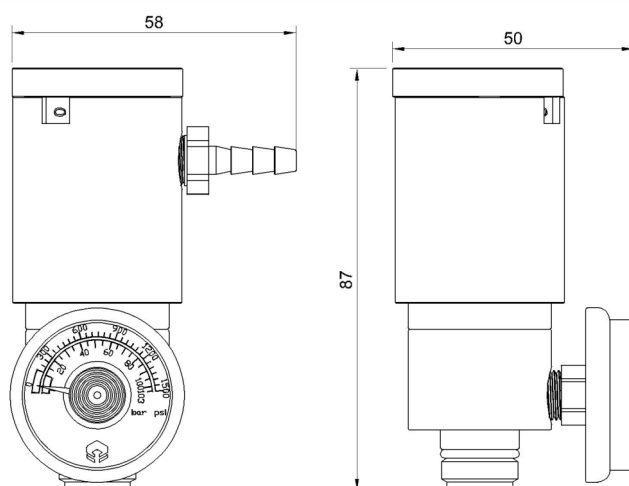

The Vari Flow Regulator uses a single stage design which gives the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases & handheld gas detectors.

Materials of construction

Body	Aluminum Silver anodized
Neck	Aluminum Silver anodized
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Bonnet	Aluminum Black Anodized

Flow rate options

1.	0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn
2.	0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn
3.	0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Flow rates	Inlet Connection	Outlet Connection	Gauge	Weight Kg
3002	0 to 1200 psig/ 83 bar	Aluminum Anodized For Non-Reactive Gases	Refer flow rate table	5/8"x18UN C10	3/16" Barb 4.8mm	Brass 0 to 1500 psig 103 bar	0.200 Kg

Warranty:- All regulators are warranted for 12 months.