



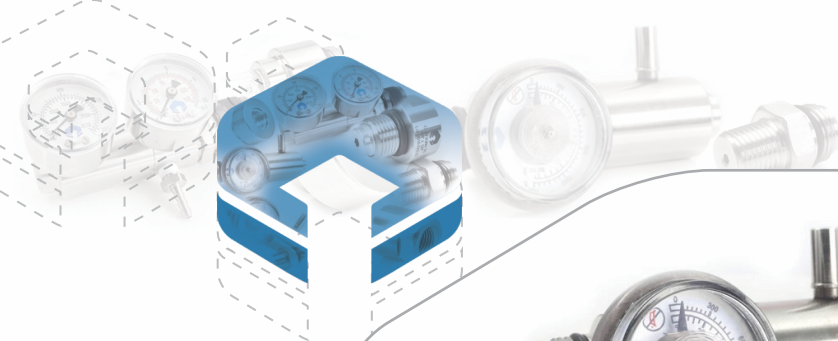

MODEL 301

PUSH BUTTON REGULATOR C10 BRASS NP

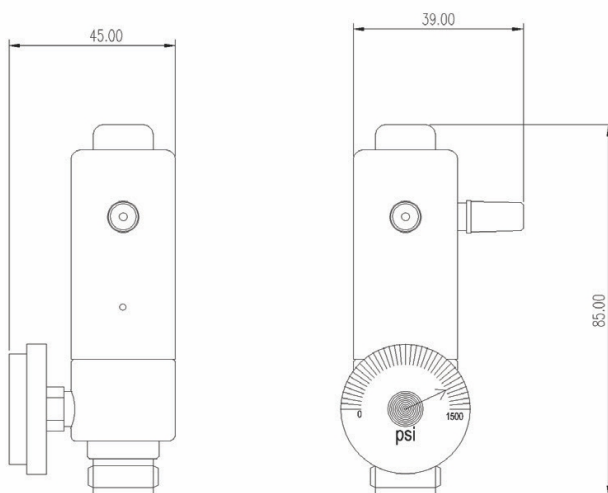

The Push Button Regulator allows the end user to manually draw gas at a constant flow, at a specific time from the cylinder with negligible flow loss. They are used for bump testing of hand-held gas detectors.

Materials of construction

Body	Brass Nickel Plated
CAP	Brass Nickel Plated
Piston	Brass
Button	Brass Nickel Plated
Seats and Seals	Viton, Buna-N, Teflon
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
301	0 to 1200 Psig / 83 bar	Brass NP- For Non-Reactive Gases	5/8"x18UN C10	6 MM Taper	60 psig- 4.1bar	Brass 0 to 1500 psig 103 bar	0.330 Kg

Warranty:- All regulators are warranted for 12 months.