

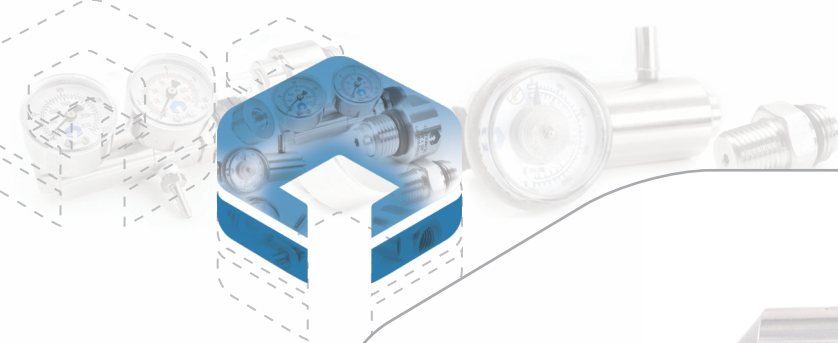


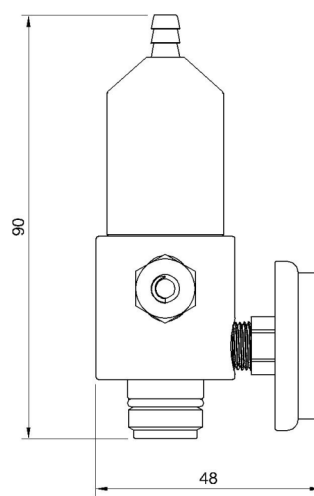

MODEL 302

PUSH TYPE REGULATOR-C10-BRASS NP

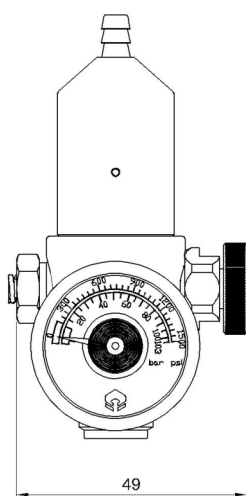

The Push Type Regulator allows the end user to manually draw gas at a constant flow, at a specific time from the cylinder with negligible flow loss. They are used for bump testing of hand-held gas detectors.

Materials of construction

Body	Stainless Steel
CAP	Brass Nickel Plated
Piston	Brass
Button	Brass Nickel Plated
Seats and Seals	Viton, HNT
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
302	0 to 1200 Psig / 83 bar	Brass NP- For Non-Reactive Gases	5/8" X 18 UN - C10	3/16" Barb	60 psig- 4.1bar	Brass N.P. 0 to 1500 psig 103 bar	0.326 Kg

Warranty:- All regulators are warranted for 12 months.