



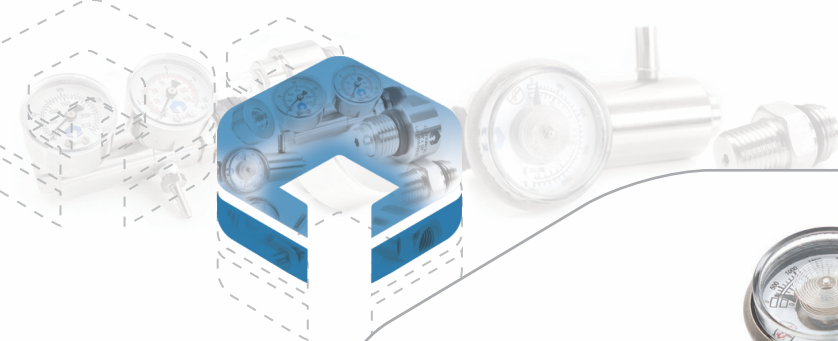

MODEL 402

HP SEPTUM REGULATOR BRASS NP

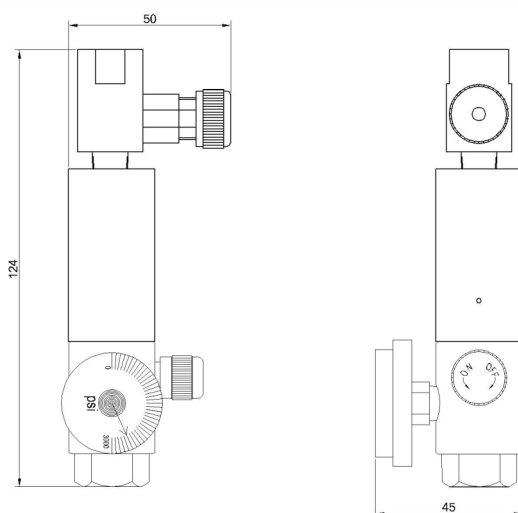

The HP Septum Regulator is a special regulator intended for laboratory gas applications in which a syringe is used for extracting the gas sample.

Materials of construction

Body	Stainless Steel
CAP	Brass Nickel Plated
Piston	Brass
Button	Buna-N
Seats and Seals	Viton, Buna-N, Teflon

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
402	0 to 3000 Psig / 200 bar	Brass NP- For Non-Reactive Gases	1/4" NPTF	Septum	60 psig- 4.1bar	SS 0 to 3180psig 220 bar	0.404 Kg

Warranty:- All regulators are warranted for 12 months.