

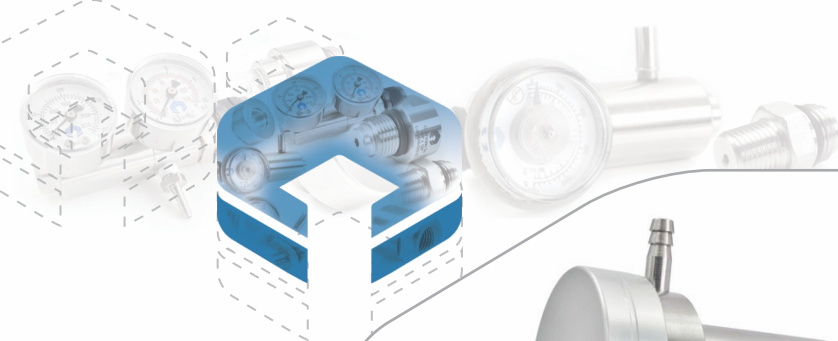


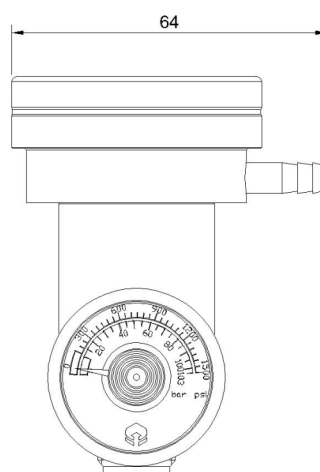

MODEL 5002

DEMAND FLOW REGULATOR-C10-STAINLESS STEEL

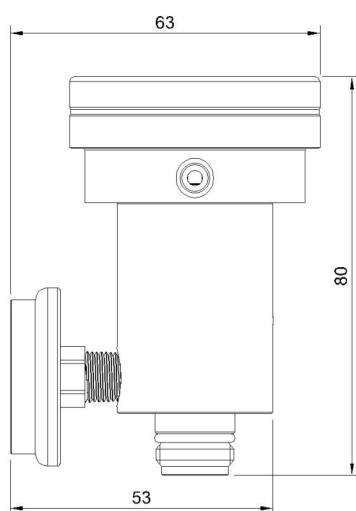

The Demand Flow Regulator-C10 is used for calibration gases, pump based instruments and handheld gas detectors. These regulators supply gas as demanded by the instrument and automatically shuts off.

Materials of construction

Body	Stainless Steel
Neck	Stainless Steel
Piston	Stainless Steel
Seats and Seals	Teflon, Viton
Diaphragm	Viton

Model	Maximum Inlet Pressure	For Reactive Gases and/or Non-Reactive gases	Maximum Vacuum Required For 3.0L/ MN Flow	Inlet Connection	Outlet Connection	Gauge	Weight Kg
5002	0 to 1200 psig/ 83 bar	Stainless Steel for Reactive Gases	0 to 3" H2O /5.6 mm Hg	5/8"x18UN C10	3/16" Barb 4.8mm	Stainless Steel 0 to 1500 psig 103 bar	0.430 Kg

Warranty:- All regulators are warranted for 12 months.