



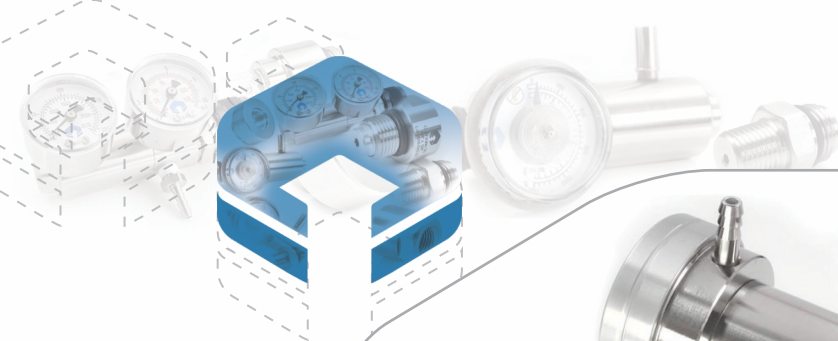

Model 5005

CGA 600 DEMAND FLOW REGULATOR BRASS NP

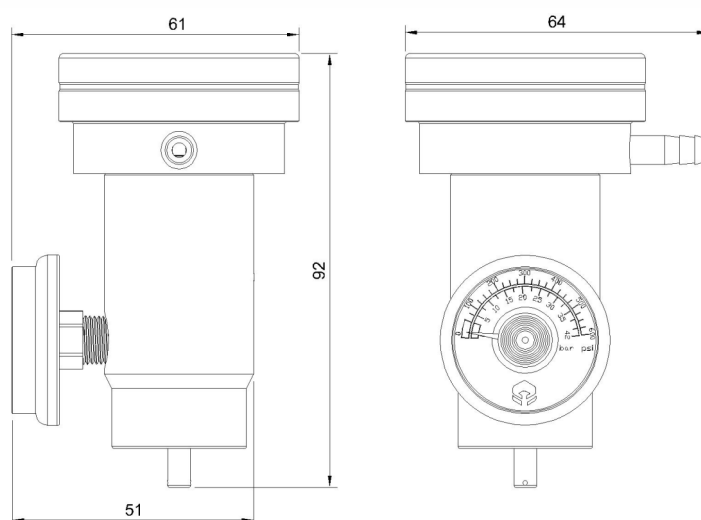

The CGA 600 Demand Flow Regulator is used for calibration gases, pump based instruments and handheld gas detectors. These regulators supply gas as demanded by the instrument and automatically shuts off.

Materials of construction

Body	Brass NP
Neck	Brass NP
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Diaphragm	Buna-N

Model	Maximum Inlet Pressure	For Reactive Gases and/or Non-Reactive gases	Maximum Vacuum Required For 3.0L/ MN Flow	Inlet Connection	Outlet Connection	Gauge	Weight Kg
5005	0 to 600 psig/ 200bar	Brass NP for Non - Reactive Gases	0 to 3" H2O /5.6 mm Hg	1" x20 UNF CGA600	3/16" Barb 4.8mm	Brass 0 to 600 psig 41 bar	0.450 Kg

Warranty:- All regulators are warranted for 12 months.