

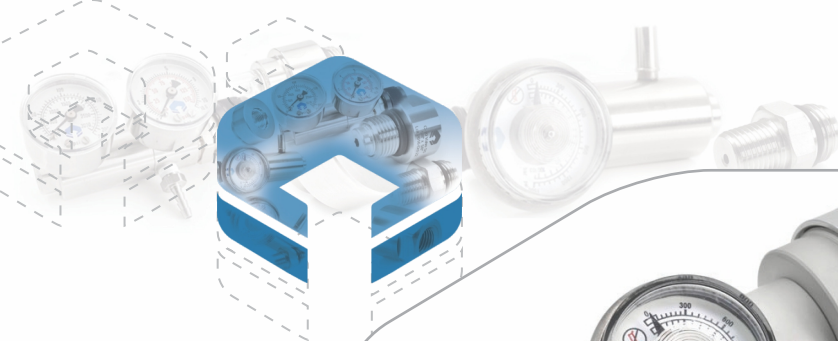


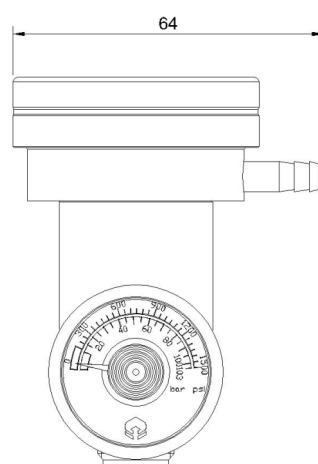

MODEL 5006

DEMAND FLOW REGULATOR C10 ALUMINUM ANODIZED

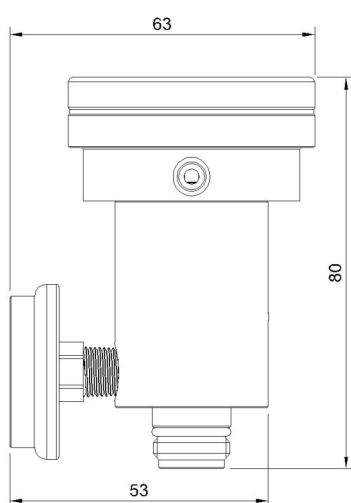

The Demand Flow Regulator is used for calibration gases, pump based instruments and handheld gas detectors. These regulators supply gas as demanded by the instrument and automatically shuts off.

Materials of construction

Body	Aluminum hard anodized
Neck	Aluminum hard anodized
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Diaphragm	Buna-N

Model	Maximum Inlet Pressure	For Reactive Gases and/or Non-Reactive gases	Maximum Vacuum Required For 3.0L/ MN Flow	Inlet Connection	Outlet Connection	Gauge	Weight Kg
5006	0 to 1200 psig/ 83 bar	For Non - Reactive Gases	0 to 3" H2O /5.6 mm Hg	5/8" X 18 UN C10	3/16" Barb 4.8mm	Brass 0 to 1500 psig 103 bar	0.210 Kg

Warranty:- All regulators are warranted for 12 months.