

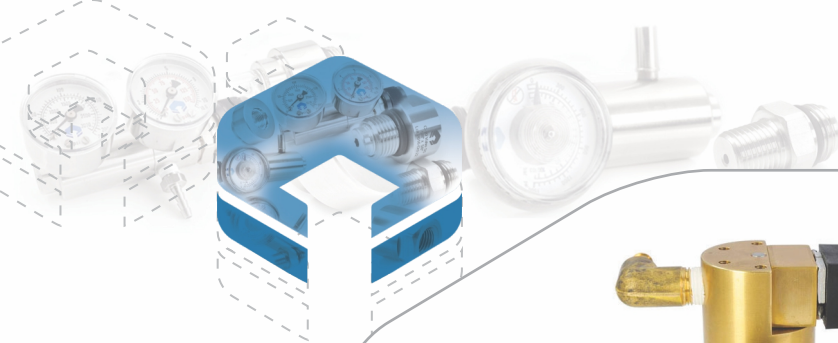



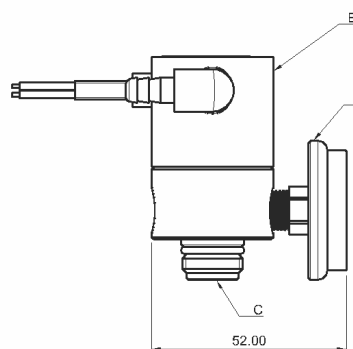

MODEL 600

SOLENOID REGULATOR C10 BRASS

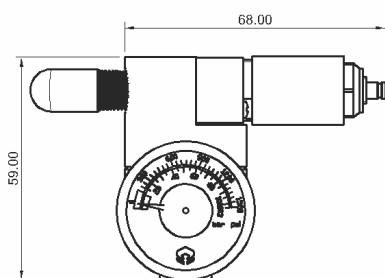

The solenoid regulators are solenoid operated and used with dry gas compact machines.

Materials of construction

Body	Brass Nickel Plated
CAP	Brass Nickel Plated
Piston	Brass
Barb Hose	Stainless Steel
Seats and Seals	Viton, Buna-N, Teflon
Solenoid coil	12VDC
Flow	Fixed as per customers requirement - 0.1 to 10.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
600	0 to 1200 Psig	Brass NP- For Non-Reactive Gases	C10 5/8"x18UN	3/16" Hose Barb	50 psig	Brass 0 to 1500 psig 103 bar	0.376 Kg

Warranty:- All regulators are warranted for 12 months.