



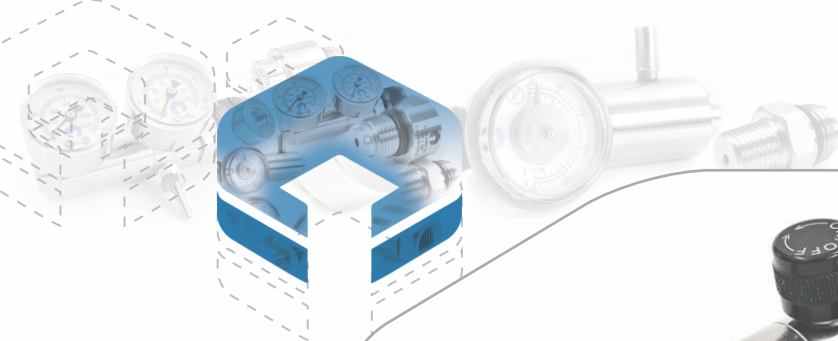

MODEL 901

CGA600 FIXED FLOW REGULATOR BRASS NP

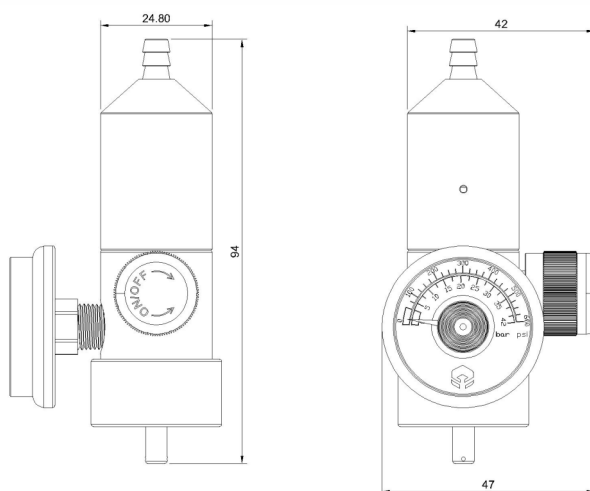

The CGA600 Fixed flow regulator uses a single stage design which allows the end user to obtain a preset constant flow rate. They are used with 17L and 34L cylinders. Used for calibration gases and handheld gas detectors.

Materials of construction

Body	Brass Nickel Plated
Cap	Brass Nickel Plated
Piston	Brass
Seats and Seals	Teflon, Viton & Buna-N
Washer	Buna-N
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
901	0 to 600 psig/ 40 bar	Brass NP - For Non-Reactive Gases	1" x20 UNF CGA600	3/16" Barb 4.8mm	30 psig- 2.1bar	Brass 0 to 600psig 40 bar	0.330 Kg

Warranty:- All regulators are warranted for 12 months.