



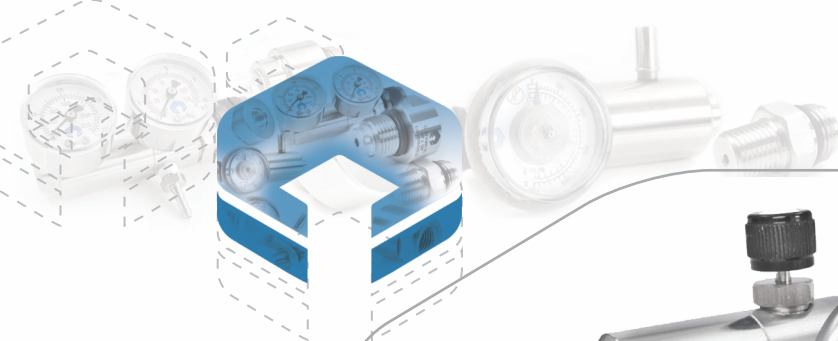

MODEL 906

FIXED FLOW REGULATOR-C10-BRASS NP-120 BAR

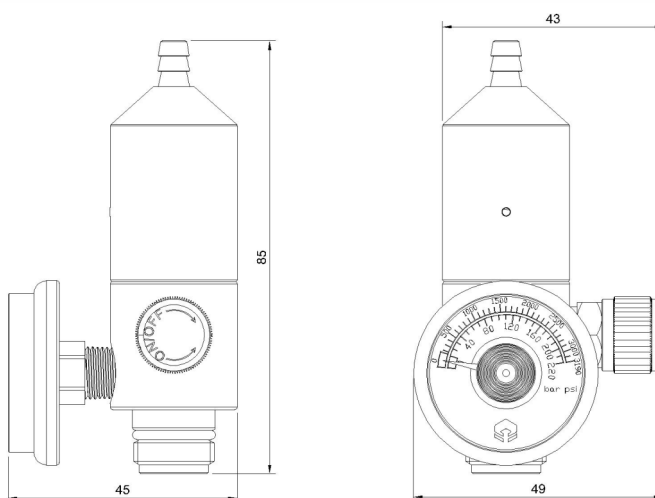

The Fixed flow regulator-C10 uses a single stage design which allows the end user to obtain a preset constant flow rate. Used for calibration gases and handheld gas detectors.

Materials of construction

Body	Stainless Steel
Cap	Brass Nickel Plated
Piston	Brass
Seats and Seals	Teflon, Viton
Flow	Fixed as per customers requirement - 0.1 to 8.0 L/Mn

Model	Maximum Inlet Pressure	For Reactive gases and/or non-reactive gases	Inlet Connection	Outlet Connection	Outlet Pressure	Gauge	Weight Kg
906	0 to 1740 Psig/ 120 bar	Brass NP- ForNon- Reactive Gases	5/8" x 18UN C10	3/16" Bard 4.8mm	60 psig- 4.1 bar	Stainless Steel 0 to 3000 psig 220 bar	0.300 kg

Warranty:- All regulator are warranted for 12 months.